

EC-PWM-A1-MPC1-E PWM DRIVER**DESCRIPTION**

Microprocessor-based PWM electronic driver for remote control of a single proportional solenoid valve.

OPERATION

The EC-PWM-A1-MPC1-E proportional valve driver receives a command signal from a potentiometer, PLC or other control systems, and supplies a solenoid with a PWM (Pulse Width Modulated) current proportional to the input signal. An auxiliary power supply (+5 V) is provided as a reference for the command signal. Adjustments of "Imin/Imax", "Ramp time" and "Dither" can be carried out directly from a key-pad integrated on the front panel.

Mounting option: female DIN 43650 socket on valve's side and male DIN 43650 plug to connect to power source and remote control devices.

FEATURES


- The current in the solenoid is independent from any change in the coil resistance or in the supply voltage.
- The inherent superimposed dither frequency helps to overcome friction and stiction effects in the controlled device.
- Power supply line is protected against reversed polarity and load dump.
- Input is protected against short circuits to GND and power supply.
- Output is protected against short circuits, over-current and over-temperature.
- The EC-PWM-A1-MPC1 is completely potted.
- Electro Magnetic Compatibility (EMC): EN 61000-6-2 (Immunity), EN 61000-6-3 (Emissions).

**SPECIFICATIONS**

Operating voltage:	8.5±30 VDC
Max current consumption:	100 mA (no load applied)
Operating temperature:	-25°C / +85°C
Input resistance 0÷5 V voltage input:	560 KOhms
0÷10 V voltage input:	1 MOhm
0÷20mA current input:	250 Ohms
Degree of protection:	IP 67
Analog input signals available:	0÷5 V 0÷10 V 0÷20 mA
Typical ctrl pot resistance:	2÷47 kΩ
Current output range (PWM):	100÷3000 mA
PWM dither frequency:	55÷200 Hz (adjustable)
Ramp time:	0.05÷5 s (adjustable)
Max. current from auxiliary +5 V:	15 mA

APPLICATIONS

Primary applications are the control of proportional pressure reducing valves and proportional flow regulators to attain smooth acceleration/deceleration and fine-metering control of electro-hydraulic functions.

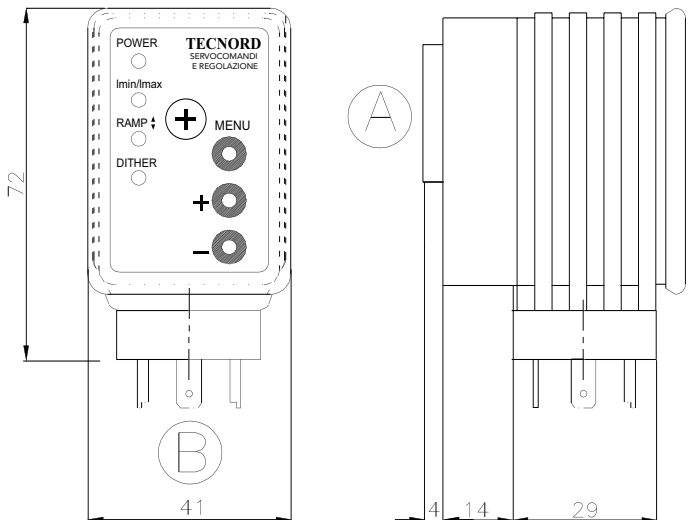DIMENSIONS

A socket connector type DIN 43650 (to proportional valve)


B plug connector type DIN 43650
(from voltage supply and remote potentiometer)

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

Via Malavolti, 36 - 41122 Modena - ITALY - Phone +39 (059) 254895 - Fax +39 (059) 253512 - mail: tecnord@tecnord.com - www.tecnord.com

EC-PWM-A1-MPC1-E PWM DRIVER


CIRCUIT BOARD PINOUT - WIRING DIAGRAM

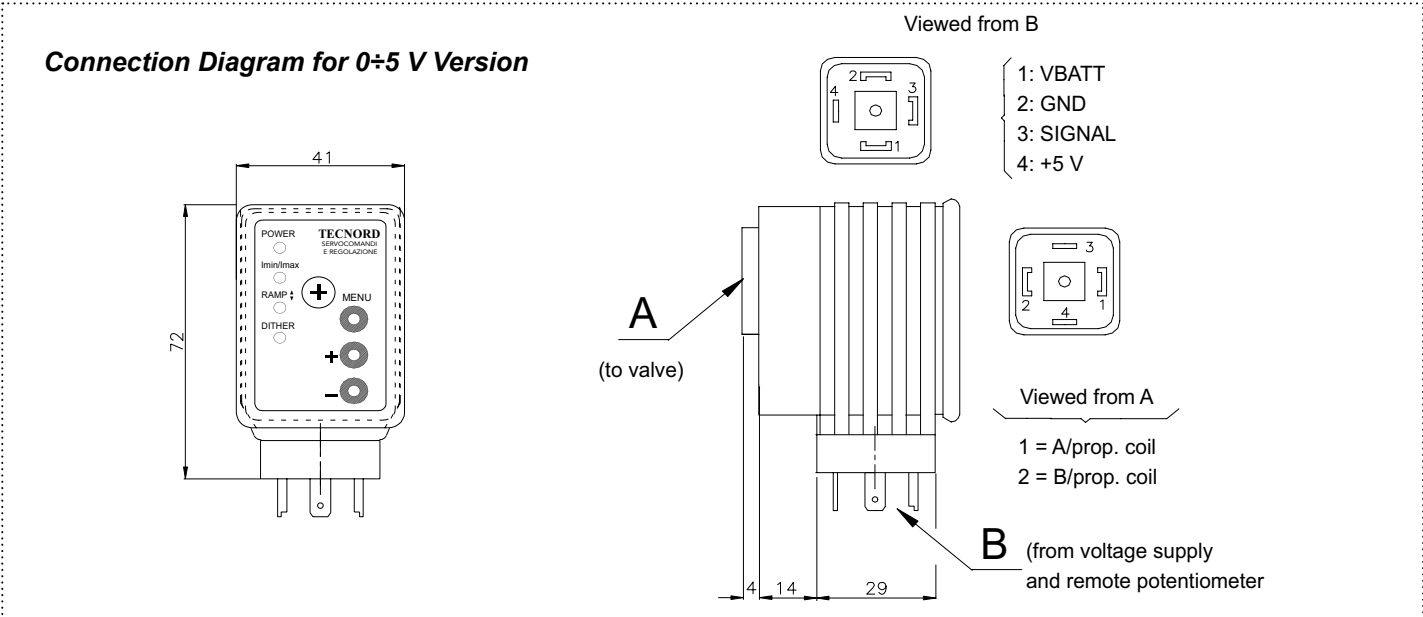


ADJUSTMENTS

The following adjustments can be made directly from the front key-pad by selecting the

- 3-pushpins in appropriate combinations:
- Imin (minimum output current)
- Imax (maximum output current)
- Ramp-up time
- Ramp-down time
- Dither frequency

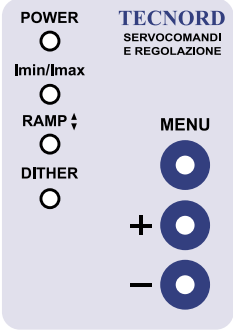

APPLICATION EXAMPLE

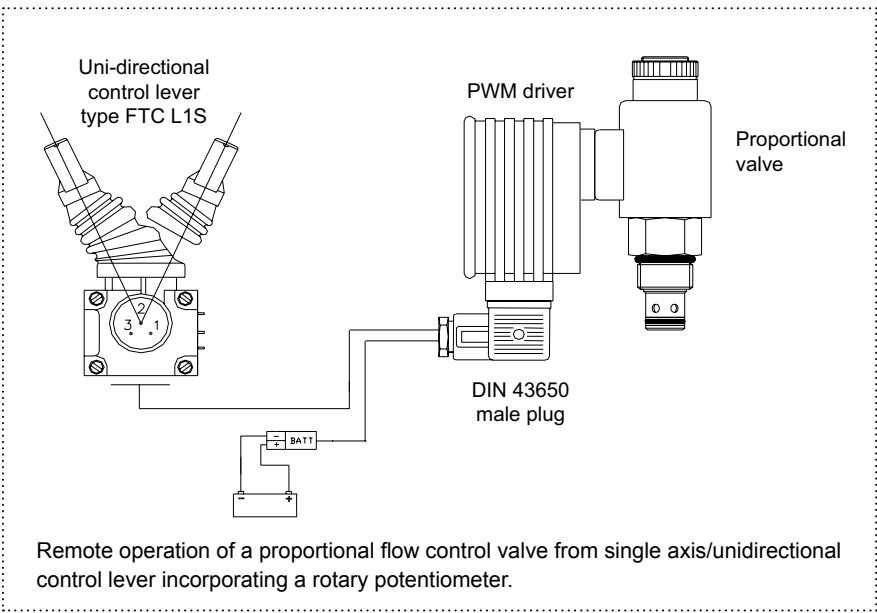

ORDERING INFORMATION

EC-PWM-A1-MPC1-E

A = Adjustable E = DIN 43650 plug connector

Part numbers	Version
23.0409.089	0-5 V
23.0409.047	0-10 V
23.0409.137	0-20 mA