

IMMERSION PROOF "P" TYPE "I" COILS

DESCRIPTION

1/2 inch (13 mm) I.D. Short Immersion Proof Coil.



FEATURES

One piece encapsulated design that is:

- Weatherproof
- Immersion proof
- Thermal shock / dunk tested
- No external metal shel

COIL SPECIFICATION

Wattage	20 Watts Nominal
Duty Rating	Continuous Duty $\pm 10\%$ rated voltage at 120°F (49°C) ambient
Min Current for Actuation	80% of rated current at room temperature
Magnet Wire Class	H or Better for all voltages
Temperature Range	-40° to 392°F (-40° to 200°C)
Protection degree	Up to IP 65 (with connector and suitable seals)
Encapsulation Material	Thermo-Plastic, resistant to moisture, caustic solutions, fungus, and vibrations

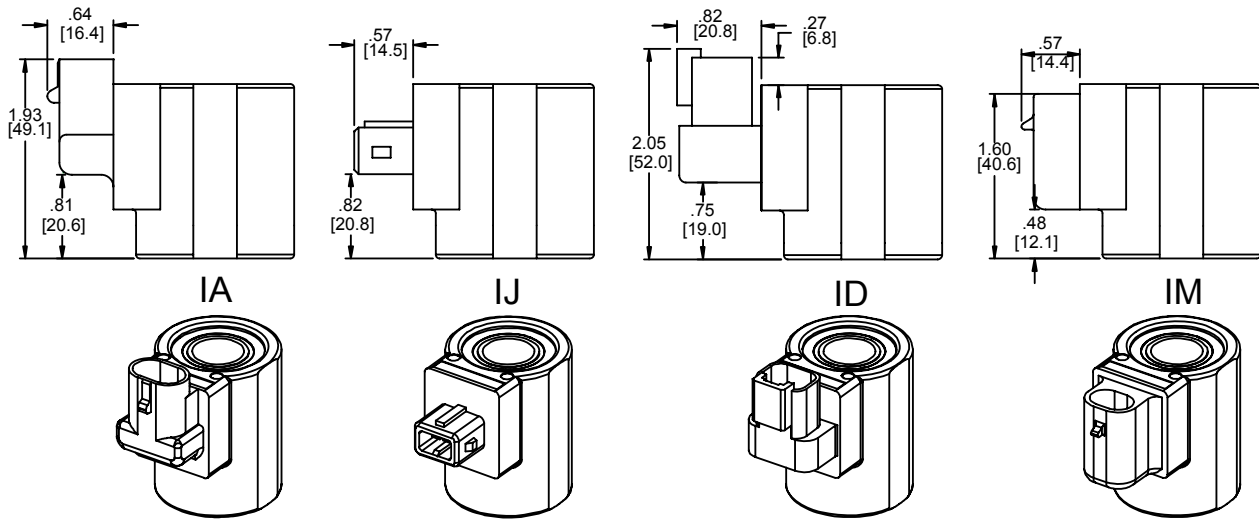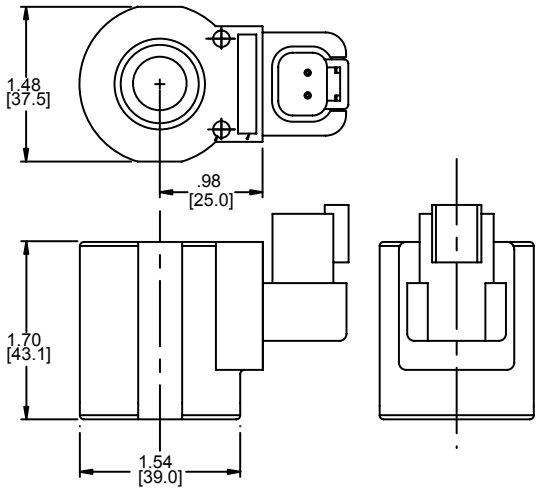

ORDERING INFORMATION

	P	-	-	
TERMINATIONS				
AMP Superseal - Integral	IA			12
Deutsch - Integral DT04-2P	ID			24
AMP Junior Timer - Integral	IJ			
Metri-Pack - Integral	IM			

Approximate Coil Weight: .43 lbs (.19 kg)

VOLTAGE

1.6 Amp Yellow Lettering  
.80 Amp Blue Lettering

NOTE: Pull type valves require nut 36202073 in lieu of standard nut.  
Push type valves require nut 36202071 in lieu of standard nut, except for PB-S2I, HB-S2C & HB-S2D use nut 36202090.

**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

11/50/2022