


HT-CVA DIRECT ACTING CHECK VALVE, POPPET

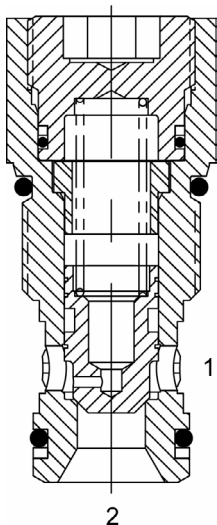

DESCRIPTION

"High Pressure" 12 size, 1 1/16-12 thread, "Tecnord" series, direct acting check valve.


OPERATION

The HT-CVA allows flow passage from (2) to (1), while normally blocking oil flow from (1) to (2). The cartridge has a fully guided poppet, which is spring biased closed, until sufficient pressure is applied at (2) to open to (1).

FEATURES


- Hardened parts for long life and low leakage.
- Industry common cavity.
- Optional bias springs for backpressure application flexibility.

HYDRAULIC SYMBOL



PERFORMANCE

Actual Test Data (Cartridge Only)

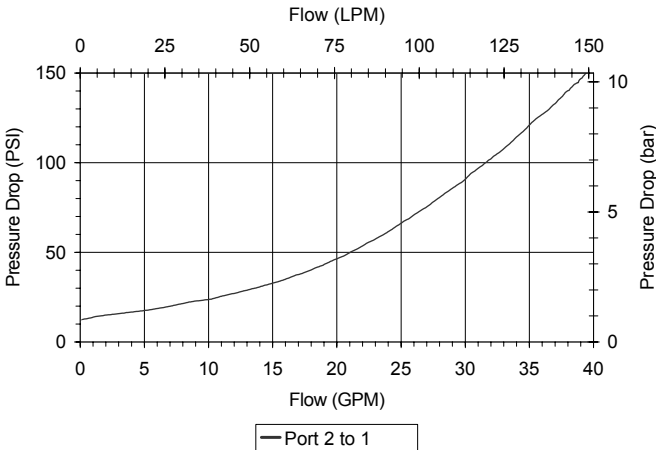


VALVE SPECIFICATIONS

Nominal Flow	35 GPM (132 LTR/M)
Rated Operating Pressure	5000 PSI (345 bar)
Typical Internal Leakage (150 SSU)	0-5 drops/min
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/16/13
Media Operating Temp. Range	-40° to 250°F (-40° to 120°C)
Weight	.55 lbs (.25 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	70 ft-lbs (95 Nm)
Cavity	TECNORD 2W
Cavity Form Tool (Finishing)	40500032
Seal Kit	21191300

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

DIMENSIONS

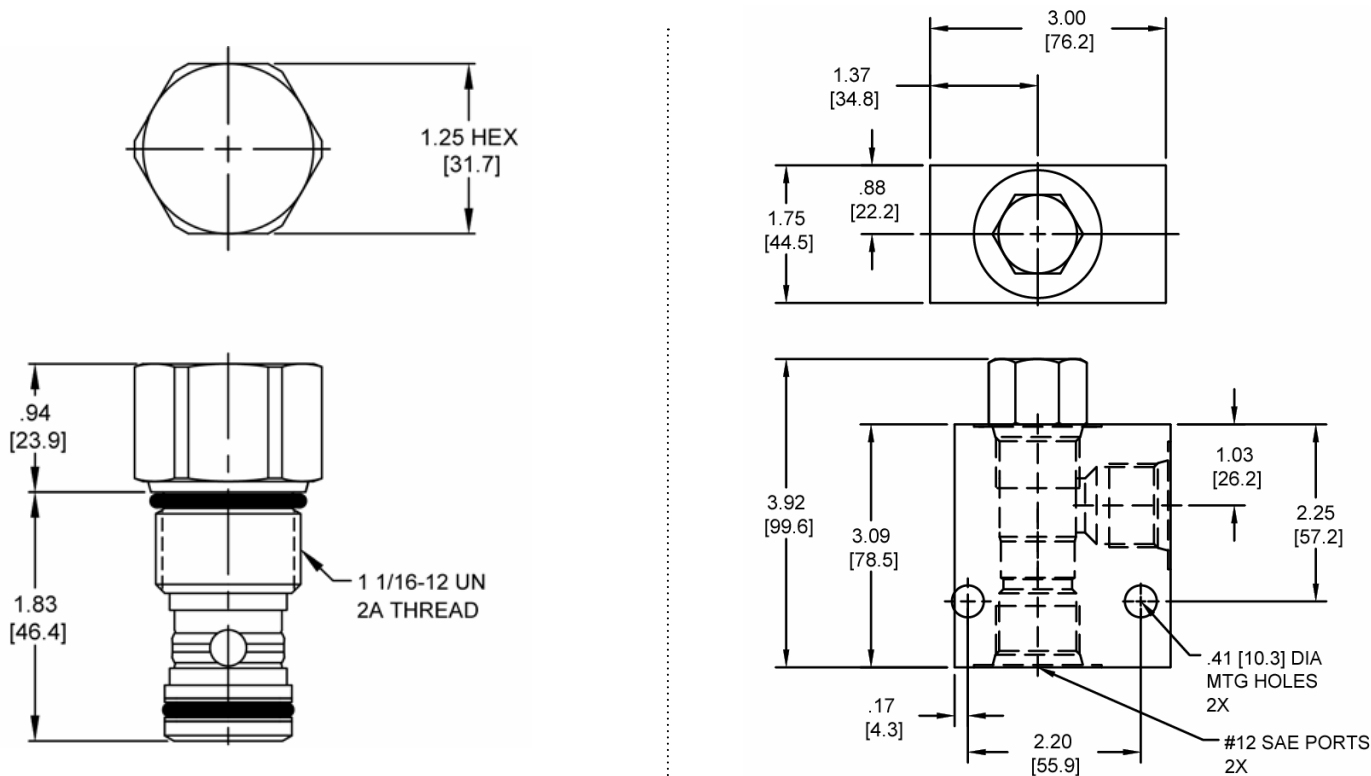

Body Weight: 3.71 lbs (1.68 kg)

ORDERING INFORMATION

HT-CVA		-	-	-	-
		OPTIONS		BODIES	
		Buna Standard		Blank	
		Viton Standard		S	
		00		Without Body	
		V0		#12 SAE Ports	
				CRACK PRESSURE	
		0010		10 PSI	
		0030		30 PSI	
		0050		50 PSI	
				± 10%	