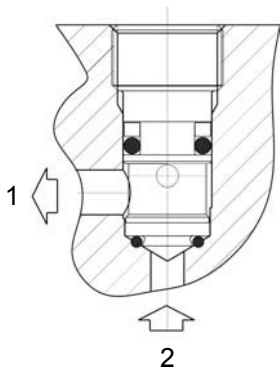



QS-CVL CHECK VALVE, INSERT TYPE**DESCRIPTION**

Special cavity, insert type, direct acting check valve.


OPERATION

The QS-CVL allows free flow passage from (2) to (1).

The valve is commonly used on load sensing lines to sense the working pressure of the functions of the circuit. The check valve is without spring inside.

HYDRAULIC SYMBOL**PERFORMANCE**

Actual Test Data (Cartridge Only)

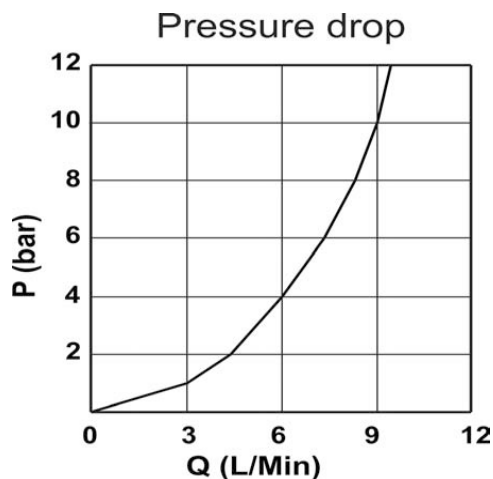
**VALVE SPECIFICATIONS**

Nominal Flow	1 GPM (4 LPM)
Rated Operating Pressure	3500 PSI (241 bar)
Typical Internal Leakage (150 SSU)	1 cu in/min (16 ml/min)
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/16/13
Media Operating Temp. Range	-40° to 250°F (-40° to 120°C)
Weight	.16 lbs (.07 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	10 - 12 Nm
Cavity	T151
Cavity Tools Kit (form tool, reamer, tap)	K-T151

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

Via Malavolti, 36 - 41122 Modena - ITALY - Phone +39 (059) 254895 - Fax +39 (059) 253512 - mail: tecnord@tecnord.com - www.tecnord.com

DIMENSIONS

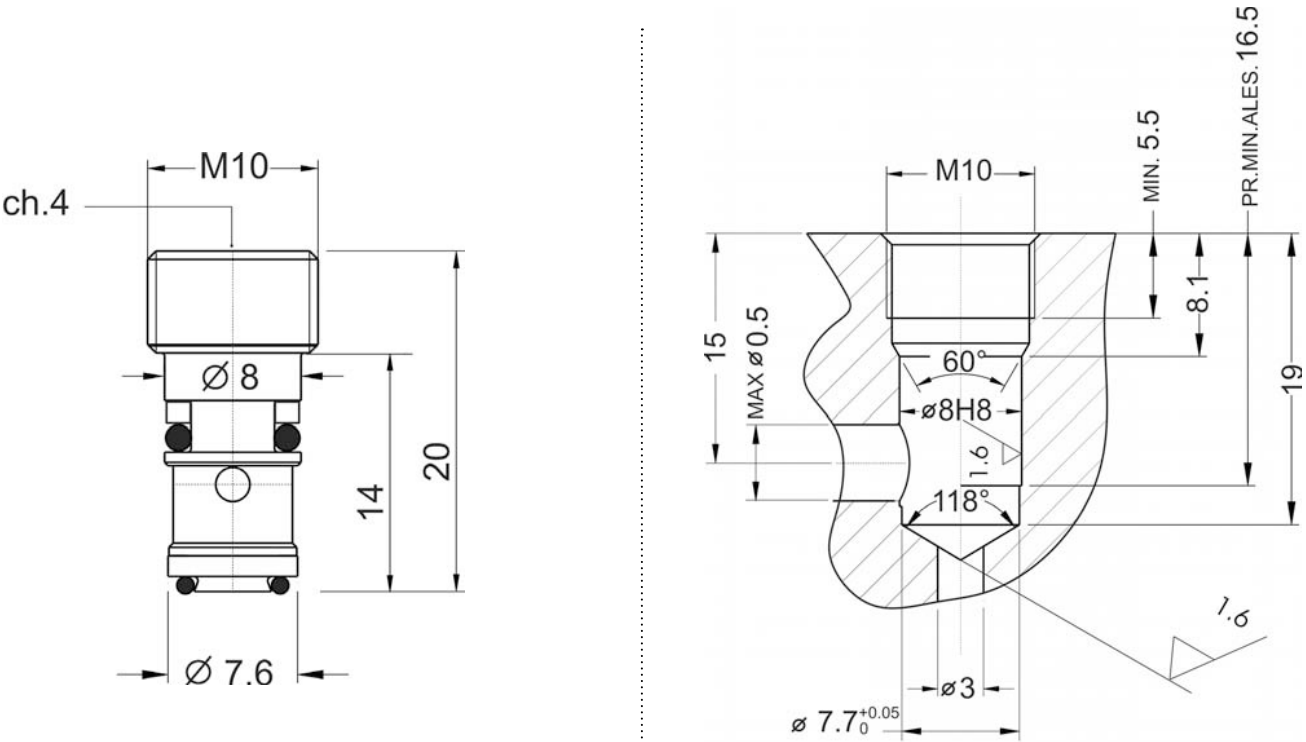

ORDERING INFORMATION

QS-CVL - - 00

OPTIONS

Buna Standard 00

Viton Standard V0