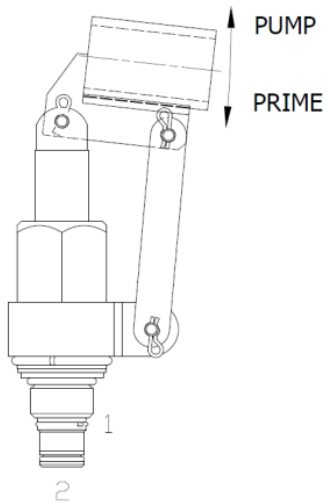


DE-HPF HAND PUMP, PULL TO PUMP TYPE**DESCRIPTION**


10 size, 7/8-14 thread, "Delta" series, cartridge type, hand pump.

OPERATION

The DE-HPF hand pump when pipe handle is pushed, primes thru port (2) and when lifted provides flow pressure to outlet port (1).

FEATURES


- Large displacement per stroke.
- Industry common cavity.

HYDRAULIC SYMBOL

*This product is not intended as a load holding device. **Linkage is not to be removed.** 36" Maximum handle length.*

PERFORMANCE

Actual Test Data (Cartridge Only)

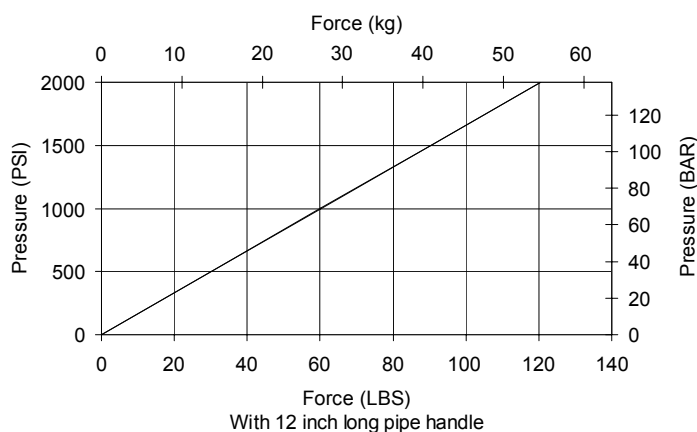
**VALVE SPECIFICATIONS**

Nominal Flow	.39 cu in/stroke
Rated Operating Pressure	3000 PSI (207 bar)
Typical Internal Leakage (150 SSU)	0-10 drops/min
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/16/13
Media Operating Temp. Range	-40° to 250°F (-40° to 120°C)
Weight	1.5 lbs (.69 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	30 ft-lbs (40.6 Nm)
Cavity	DELTA 2W
Cavity Form Tool (Finishing)	40500000
Seal Kit	21191200

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

Via Malavolti, 36 - 41122 Modena - ITALY - Phone +39 (059) 254895 - Fax +39 (059) 253512 - mail: tecnord@tecnord.com - www.tecnord.com

DIMENSIONS

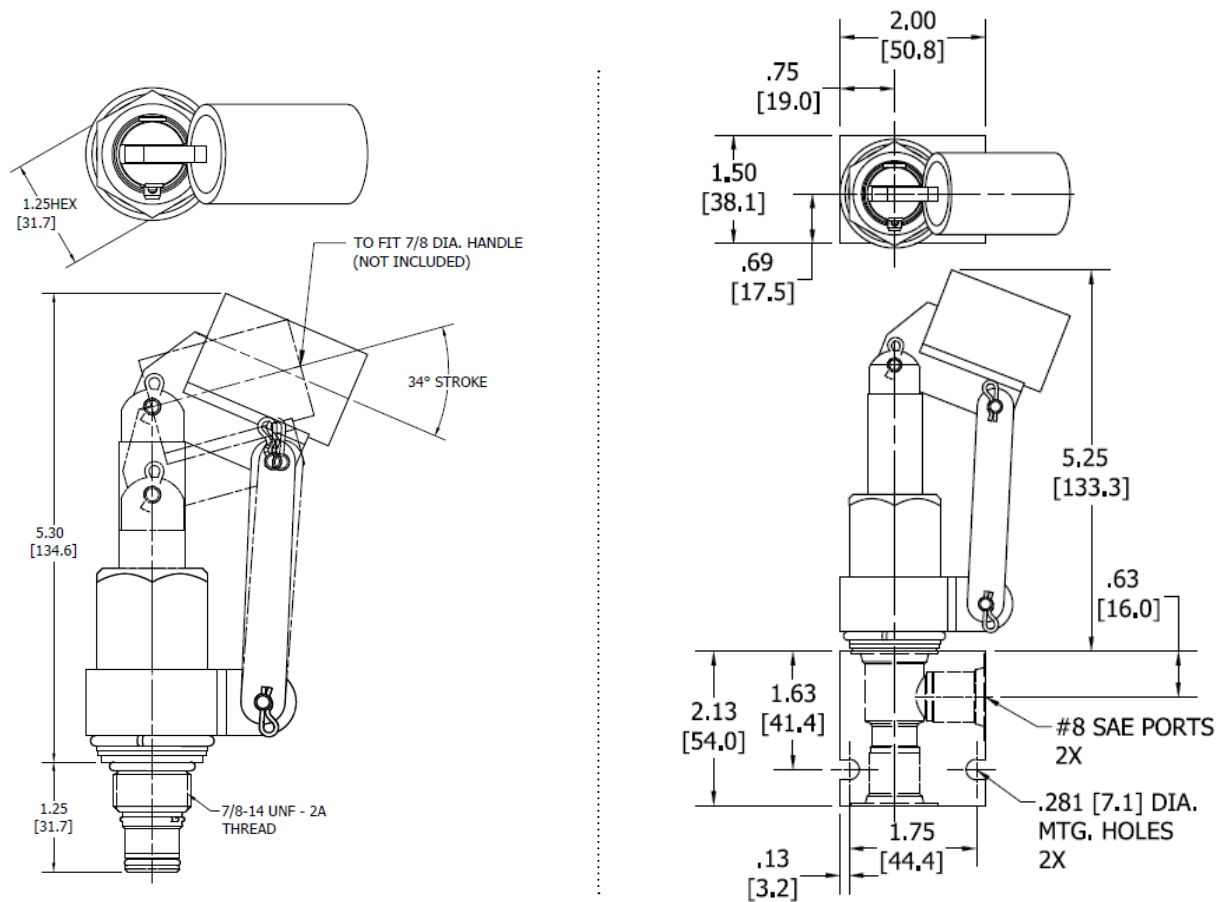

Body Weight: .47 lbs (21 kg)

ORDERING INFORMATION

DE-HPF -

OPTIONS

Buna, Linkage	0L
Viton, Linkage	VL

OL

VL

BODIES

Blank	Without Body
N	3/8" NPTF Ports
S	#8 SAE Ports

Blank

N

S