

EC-SNR-ANG-D3030-H J1939 DUAL AXIS INCLINOMETER (TILT DEVICE) - CANBUS INTERFACE

DESCRIPTION

Absolute dual axis inclinometer sensor based on earth's gravity.

OPERATION

Signal outputs are linearly proportional to the tilt angle to the ground. With a measurement range of $\pm 30^\circ$ this device is designed to be connected in a CANbus J1939 network (CANOpen optional). It is normally used to control the planarity of chassis or mechanical structure respect to the earth line. Contact Tecnom for the $\pm 90^\circ$ option.

FEATURES

- Supply line is protected against reversed polarity and load dump.
- Outputs are protected against short circuits to GND and supply.
- Microprocessor based.
- Vibration and shock resistant.
- Anti-debouncing software filter.
- Compatible with safety requirements:
PL = c
PL = d when two inclinometers are installed
- Electro Magnetic Compatibility (EMC): EN 61000-6-2 (Immunity)
EN 61000-6-3 (Emissions)

SPECIFICATIONS

Operating voltage:	8-32 VDC
Max current consumption:	40 mA
CANbus physical layer:	ISO 11898, 250 kbit/s
CANbus protocol:	J1939
Max working angle for each axis:	$\pm 30^\circ$
Resolution:	0.10°
Operating temperature:	-40°C / +105°C
Degree of protection:	IP 68
Connector type:	Deutsch DT04-4P or M12
Fixing screws included:	n.4 - M5x20
Weight:	120 g (screws included)

APPLICATIONS


- 12 VDC and 24 VDC systems.
- Automatic self levelling system for trucks, agricultural machines and lift equipment.
- Vehicle tilt monitoring.

ORDERING CODE


- 20.0401.045** with Deutsch connector
20.0401.046 with M12 connector



DIMENSIONS

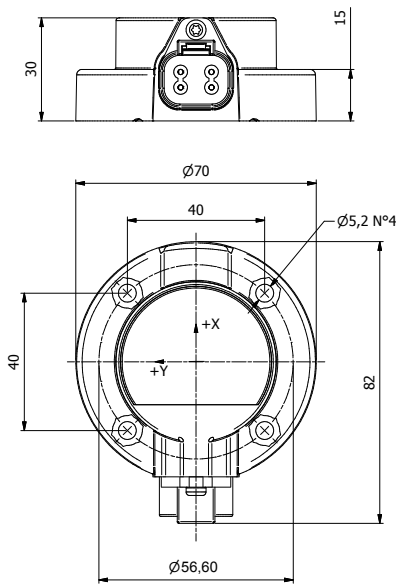


CONNECTIONS



Deutsch DT04-4P

- 1 +VBATT
2 GND
3 CAN-H
4 CAN-L



M12

- 1 +VBATT
2 GND
3 CAN-H
4 CAN-L