

## EC-SNR-POS-750-H SLIP-IN SPOOL POSITION TRANSDUCER

### DESCRIPTION

Position transducer based on Hall effect sensor to detect a movement from the neutral (zero) position. Slip-in assembly.

### OPERATION

The sensor provides two directional signal outputs, each output becomes active when a movement is detected in its corresponding direction. Outputs are active low. Two low outputs means fault. It can be used as a safety device in conjunction with Tecnord's MMS electronic units (e.g. MMS 1521).

### FEATURES

- Power supply line is protected against reversed polarity and overvoltage.
- Output protected against short circuits to GND and supply.
- Redundant version (dual electronics) available.
- Electro Magnetic Compatibility (EMC): EN 61000-6-2 (Immunity)  
EN 61000-6-3 (Emissions)

### SPECIFICATIONS

Operating voltage (VBATT):	6÷32 VDC
Max current consumption:	<15mA
Operating temperature:	-40°C / +85°C
Degree of protection:	IP 67
Maximum operating pressure:	45 bar
Output signal (inactive):	open collector (pnp)
Output signal (active):	VBATT
Switching threshold:	1 mm
Maximum mechanical stroke:	±8 mm
Connector pins:	1 +V (POWER SUPPLY) 2 -V (POWER SUPPLY) 3 OUT A 4 OUT B
Connector type:	Deutsch DT04-4P

### APPLICATIONS


- 12 VDC and 24 VDC systems.
- Spool position detect for electrohydraulic manifolds.

### ORDERING CODE


20.0204.006



### OUTPUT SIGNAL

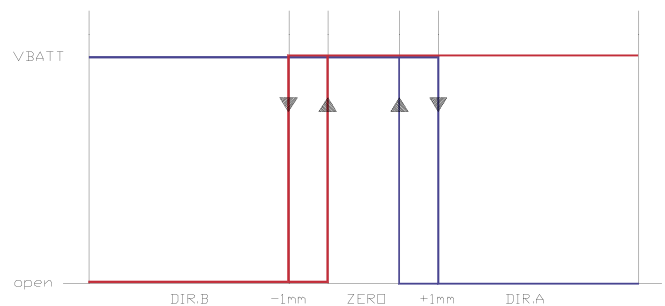

### DIMENSIONS

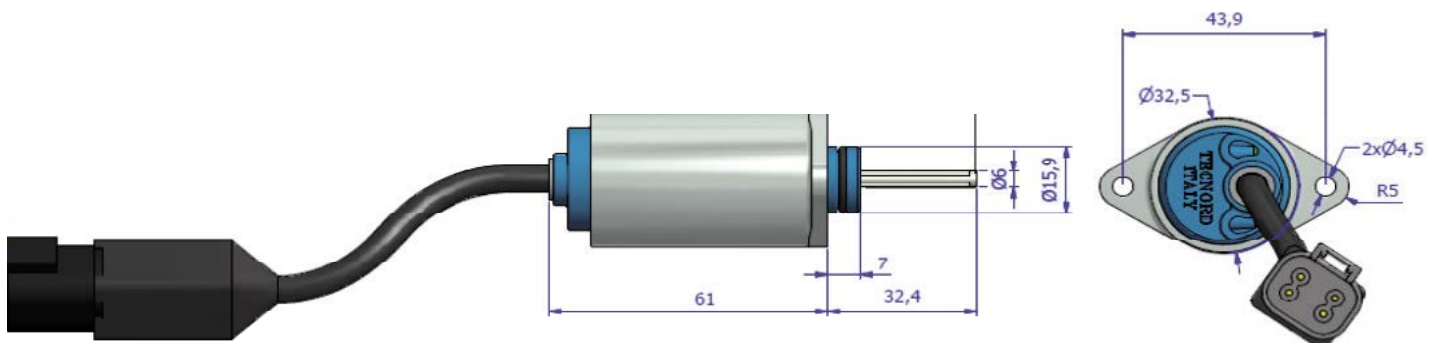

**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

Via Malavolti, 36 - 41122 Modena - ITALY - Phone +39 (059) 254895 - Fax +39 (059) 253512 - mail: [tecnord@tecnord.com](mailto:tecnord@tecnord.com) - [www.tecnord.com](http://www.tecnord.com)